# EASY COMBO EMERGENCY LIGHT OR EMERGENCY EXIT LIGHT YB152WM120

























Self-contained Emergency / Exit Light with 1 h Battery and Lumi Test Self-testing. The package includes the luminaire, and a rotatable sign.

Teknoware Easy Combo is a combination light, which can be used as either an emergency or emergency exit light. When fitted with the rotatable sign, Combo can show the direction arrow pointing up, down, left or right. When Combo is used as an emergency exit light, a separate ceiling bracket is needed for ceiling installation (TWTB104). When Combo is used as an emergency light, the sign is not installed.

Easy Combo can easily be surface or semi-flush mounted thanks to its practical design. Easy's wide product family offers an ideal choice when you want a single fixture for your entire property's needs.




| Product Code                                  | YB152WM120                     |  |
|---|--------------------------------|--|
| Feature                                       | Lumi Test                      |  |
| Mounting (standard)                           | wall, ceiling, surface, recess |  |
| Customs Code                                  | 94056080                       |  |
| GTIN Code                                     | 6438045024677                  |  |
| ETIM Product Class                            | EC001957                       |  |
| Length  | 270 mm                         |  |
| Width   | 147 mm                         |  |
| Height  | 60 mm                          |  |
| Weight  | 0.55 kg                        |  |
| Backup  | 1h                             |  |
| Max Input Power VA                            | 8 VA                           |  |
| Nominal Supply Voltage 220-240 V, 50/60 Hz AC |                                |  |
| Protection Class                              | II .                           |  |
| IP Class                                      | IP40                           |  |
| Temperature Range Min - Max                   | -5+35 °C                       |  |
| Glow Wire Test of Plastic Materials           | 850 °C                         |  |
| Viewing Distance                              | 25 m                           |  |
| Body Material                                 | plastic                        |  |
| Colour  | RAL9003                        |  |
| Electrical Installation                       | 2/3 x 2,5 mm <sup>2</sup>      |  |
| Luminous Flux                                 | 170 lm                         |  |

### Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.



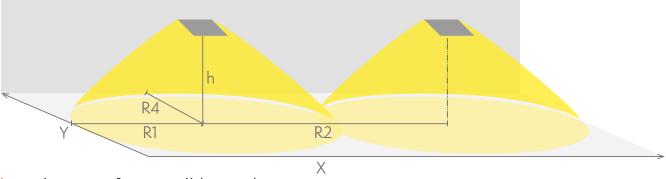

R1 distance from wall (X axis)
R2 installation distance between lights (X axis)
R4 distance from wall (Y axis)


YB152WM120

| Mounting height (m) | Below the light lux | R1 (m) | R2 (m) | R4 (m) |
|---------------------|---------------------|--------|--------|--------|
|                     |                     | 1 lux  | 1 lux  | 1 lux  |
| 2,5                 | 7                   | 3      | 8      | 1      |
| 3                   | 5                   | 3      | 8.5    | 1      |
| 4                   | 2.5                 | 3      | 9.5    | 1      |

### Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table.

Level of measurement 0,02 m, measurement result with battery operation.

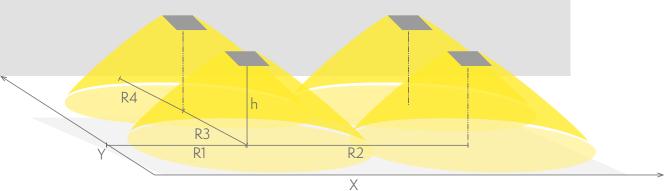

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R3 installation distance between lights (Y axis)

R4 distance from wall (Y axis)

YB152WM120

| Mounting height (m) | Below the light lux | R1 (m)  | R2 (m)  | R3 (m)  | R4 (m)  |
|---------------------|---------------------|---------|---------|---------|---------|
|                     |                     | 0,5 lux | 0,5 lux | 0,5 lux | 0,5 lux |

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved.

Date: May 17, 2024 | Source: teknoware.fi/en/easy-combo-emergency-light-or-emergencyexit-light-yb152wm120



| Mounting height (m) | Below the light lux | R1 (m) | R2 (m) | R3 (m) | R4 (m) |
|---------------------|---------------------|--------|--------|--------|--------|
| 2,5                 | 7                   | 3.5    | 7      | 7      | 3.5    |
| 3                   | 5                   | 3.5    | 7      | 7      | 3.5    |
| 4                   | 2.5                 | 3.5    | 7.5    | 7.5    | 3.5    |
| 6                   | 1.2                 | 4      | 8      | 8      | 4      |

#### **OPTIONAL ACCESSORIES:**

# SHOCK PROTECTING COVERS FOR EMERGENCY LIGHTS



| Product Code | Product Name                       | Compatible Product Groups  |
|--------------|------------------------------------|--|
| TW77508B     | Shock protecting cover<br>TW77508B | ESC 0,5 Emergency Exit Lights, ESC 4 Emergency Exit Lights, ESC 90 Emergency Exit Lights, Safe 82 Emergency Lights |

### OTHER ACCESSORIES FOR EMERGENCY LIGHTS



| Product Code | Product Name                   | Compatible Product Groups                   |
|--------------|--------------------------------|---|
| TWTB110      | Easy Combo IP54 gasket TWTB110 | Other Accessories for Emergency Exit Lights |

# OPTIONAL MOUNTING ACCESSORIES FOR EMERGENCY EXIT LIGHTS



| Product Code | Product Name                             | Compatible Product Groups  |
|--------------|--|--|
| TWTB101      | Easy Combo recess mounting frame TWTB101 | Easy: Combo Emergency / Exit Light, Easy Combo<br>Emergency / Exit Light |
| TWTB103      | Easy Combo flag bracket TWTB103          | Easy: Combo Emergency / Exit Light, Easy Combo<br>Emergency / Exit Light |
| TWTB104      | Easy Combo ceiling bracket TWTB104       | Easy: Combo Emergency / Exit Light, Easy Combo<br>Emergency / Exit Light |
| TWTB105      | Easy Combo suspension bracket<br>TWTB105 | Easy: Combo Emergency / Exit Light, Easy Combo<br>Emergency / Exit Light |



